

MERITOR® MA212 STANDARD BRAKE LINING 21,000 LBS GAWR



MERITOR®









IDEAS DRIVING RESULTS

DELIVERING EXCEPTIONAL BRAKING
POWER AND FRICTION STABILITY WITHOUT
SACRIFICING LINING OR DRUM WEAR



TECHNICAL DATA - TYPICAL TEST RESULTS

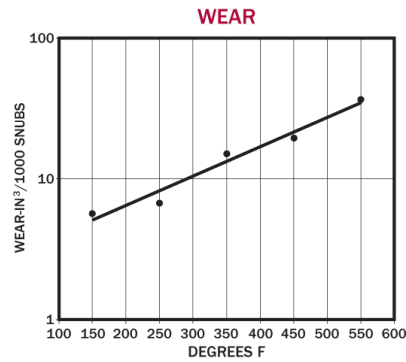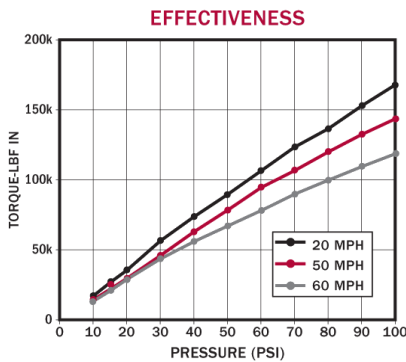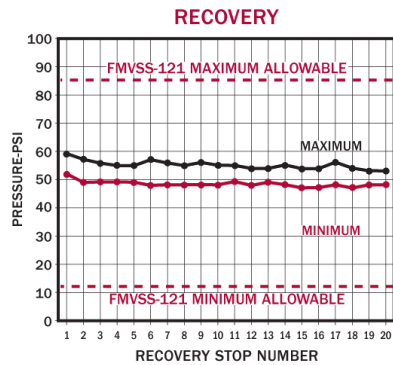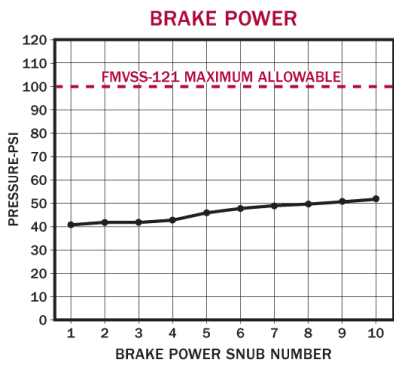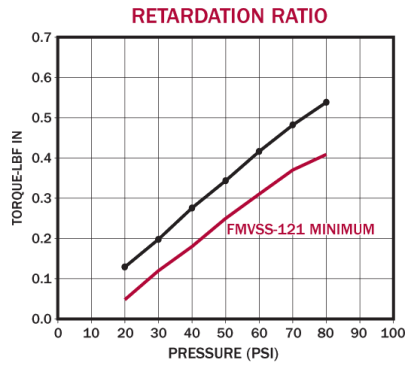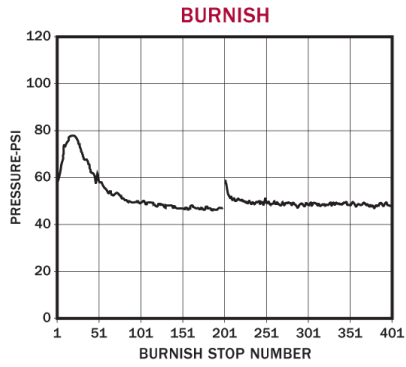

TEST PARAMETERS	
Axle Rating	21,000 lbs
Brake Type and/or Size	16.5" x 7" Meritor Q Plus
Wheel Load	10k
AL Factor	165
Rolling Radius	20.8
Drum Weight	113 lbs
PROPERTIES	
Gogan Hardness	25
Specific Gravity	2.05
Flexural Strength	6,300 psi
Temperature Range	to 550°F
Material	Non-Asbestos
SAE J661A	
Normal Friction COF	.38 (F)
Hot Friction COF	.41 (F)

FEATURES AND BENEFITS

- Rated 21,000 lbs. GAWR at 165 AL (T30 chamber x 5.5" slack adjuster)
- Crafted from friction material proven to optimise brake performance
- Preferred as the lining of choice for many OEM vehicle manufacturers and the standard friction on Meritor trailer axles
- Easily handles stop and go urban traffic and over highway applications
- Recognised for durability and value
- Ideal for truck, trailer and bus applications
- Excellent choice for hauling general cargo, grain and liquids
- Versatile performance in a variety of application over general terrain, including dump trucks



Meritor Heavy Vehicle Systems
 50 Calarco Drive
 DERRIMUT VIC 3030
 AUSTRALIA

Phone: (+61 3) 8353 6050
 Fax: (+61 3) 8353 6060
 Email: cvaau.sales@meritor.com

meritorpartsonline.com
meritor.com